Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: L8Design

Supplier's address: Compliance Service, Stensgårdvej 1, DK5500 Middelfart, DK

Model identifier: 632016006

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	E
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	1 055 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control — Height	60	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Width	60		
Depth	110		


parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		Yes	If yes, equivalent power (W)	75
			Chromaticity coordinates (x and y)	0,440 0,403
Parameters for LED and OLED light sources:				
R9 colour rendering index value		4	Survival factor	0,90
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[(b)]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,4

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

Spectrum Test Report

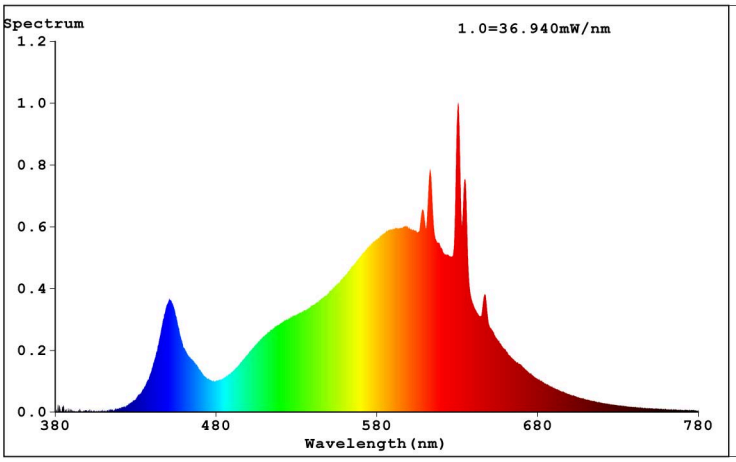

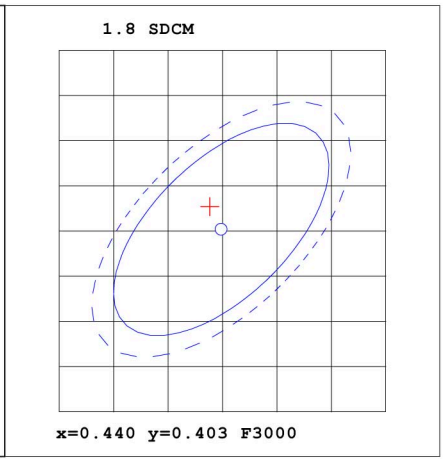

Color Parameters:

Chromaticity Coordinate:x=0.4389 y=0.4055/u'=0.2512 v'=0.5223

CCT=2979K(Duv=0.0003) Dominant WL:Ld =582.8nm Purity=53.5%

Ratio:R=22.9% G=74.8% B=2.4% Peak WL:Lp=630.6nm FWHM=69.5nm

Render Index:Ra=81.4

R1 =79	R2 =89	R3 =97	R4 =79	R5 =79	R6 =87	R7 =82	
R8 =58	R9 =4	R10=76	R11=78	R12=67	R13=81	R14=99	R15=72

Photo Parameters:

Flux = 1078.4 lm Eff. : 120.23 lm/W Fe = 3.274 W

Electrical parameters:

V = 229.78 V I = 0.0622 A P = 8.97 W PF = 0.6274

LEVEL:OUT WHITE:ANSI_3000K

Status: Integral T = 259 ms Ip = 59238 (90%)

Model:	No. A60 9W-230V
Tester:	Date:2026-04-03
Temperature:Deg	Humidity:65.0%
Manufacturer:	Remark:

EPREL registration number: 2698487 Model placed on the Union market from 01/09/2026.	https://eprel.ec.europa.eu/qr/2698487

Supplier: T. Hansen Gruppen A/S (Manufacturer) **Website:**

Customer care service:

Name: Compliance Service **Website:** thansen.dk

Email: compliance@thansen.dk **Phone:** +45 31 31 31 31

Address:
Stensgårdvej 1
DK5500 Middelfart
Denmark